




0371

RECESSED DOWNLIGHT

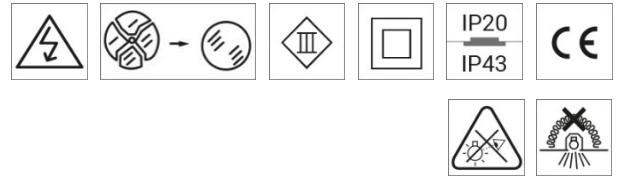

**WARNING**  
**ANY MODIFICATION TO THIS FITTING IS FORBIDDEN WITHOUT PRIOR AUTHORIZATION**

Our policy is the constant improvement of the product. We reserve the right to modify the characteristics of the equipment without prior notice. Please refer to the website [www.arcluce.it](http://www.arcluce.it) for this and other technical documents continually updated.

All information is presented in good faith. no responsibility may be imputed to us for errors, omissions or incorrect interpretations.

The photographs and drawings are within the limits of the quality of the printed reproduction, not binding and indicative only.



Directive 2002/96/CE (Waste Electrical and Electronic Equipment - WEEE). The crossed out wheeled bin label that this product should not be disposed how the normal household waste stream, but with a separate collection; this in order to prevent potential negative consequences for the environment and the human health. For more details on available collection facilities please contact your local government office or the dealer where you purchased this product.


The safety and the proper functioning of the fitting is guaranteed only respecting the electrical Standards and this mounting instructions; therefore it's necessary to keep them.

Installation should be carried out by a suitable qualified person. Always refer to electrical data on the fixture label.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Only use original ARCLUCE spare parts.



Turn off power before maintenance.



Replace any cracked shield.




Risk group 2 (IEC/TR62778). Do not stare at operating LED.



Luminaires not suitable for covering with thermally insulating material.

## SPECIFICATIONS

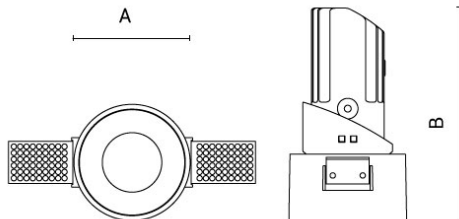

### MECHANICAL


<b>Dimensions:</b>	A: Ø55 mm B: 97 mm
<b>Weight:</b>	0.25 Kg
<b>Rated Ta:</b>	-20°C ÷ +25°C

### ELECTRICAL

<b>Wiring:</b>	ON/OFF	REM-D
<b>Input:</b>	220-240V 50/60Hz	700mA for 2W versions; 500 mA for 6W versions;
<b>Electrical insulation class</b>	II	III




REM-D versions: This is a constant current fixture. It requires a series connection of fixtures to the driver.



## ACCESSORIES

1099251X



Kit to enhance the IP rating from IP43 to IP54. To be ordered together with the luminaire.

## INSTALLATION

1. Perform necessary cut-out in the false ceiling with correct dimensions.
2. Select the correct ceiling thickness, secure ring and apply plaster and finishing.
3. Wire the fixture respecting indications.
4. Hold the springs in upright position and slide fixture in the recessed cut-out

**1**

CLEARANCE	
A	20 cm
B	5 cm
C	5 cm
D	10 cm

Allowed ceiling thickness: 5-15mm

IP43 Standard

IP54 Requires accessory 1099251X

Warning: The IP43-54 degree of protection is guaranteed provided that the device is installed in a completely closed false ceiling.

**2**

28.5 mm

12.5 mm

To choose between 12.5 mm and 28.5 mm, reverse the bracket.

A: Secure ring to false ceiling using appropriate screws.

B: Apply plaster and finishing.

**3**

Turn off power. Do not pinch or damage the cable.

**A ON/OFF**

LINE - BROWN

NEUTRAL - BLUE

**B REM-D**

+ LED - WHITE

- LED - BLACK

REM-D versions: This is a constant current fixture. It requires a series connection of fixtures to the driver.

Connect the fixture to the driver before supplying the power.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

The cable connection must have an IP rating at least equal or higher than the fixture itself.

**4**

Do not pinch or damage the cable.

Do not hold the fixture by the wire.

CLIC CLIC

Make sure the clips are engaged when fully inserted.